




PTFE LINED SPARGER FLANGE END 150

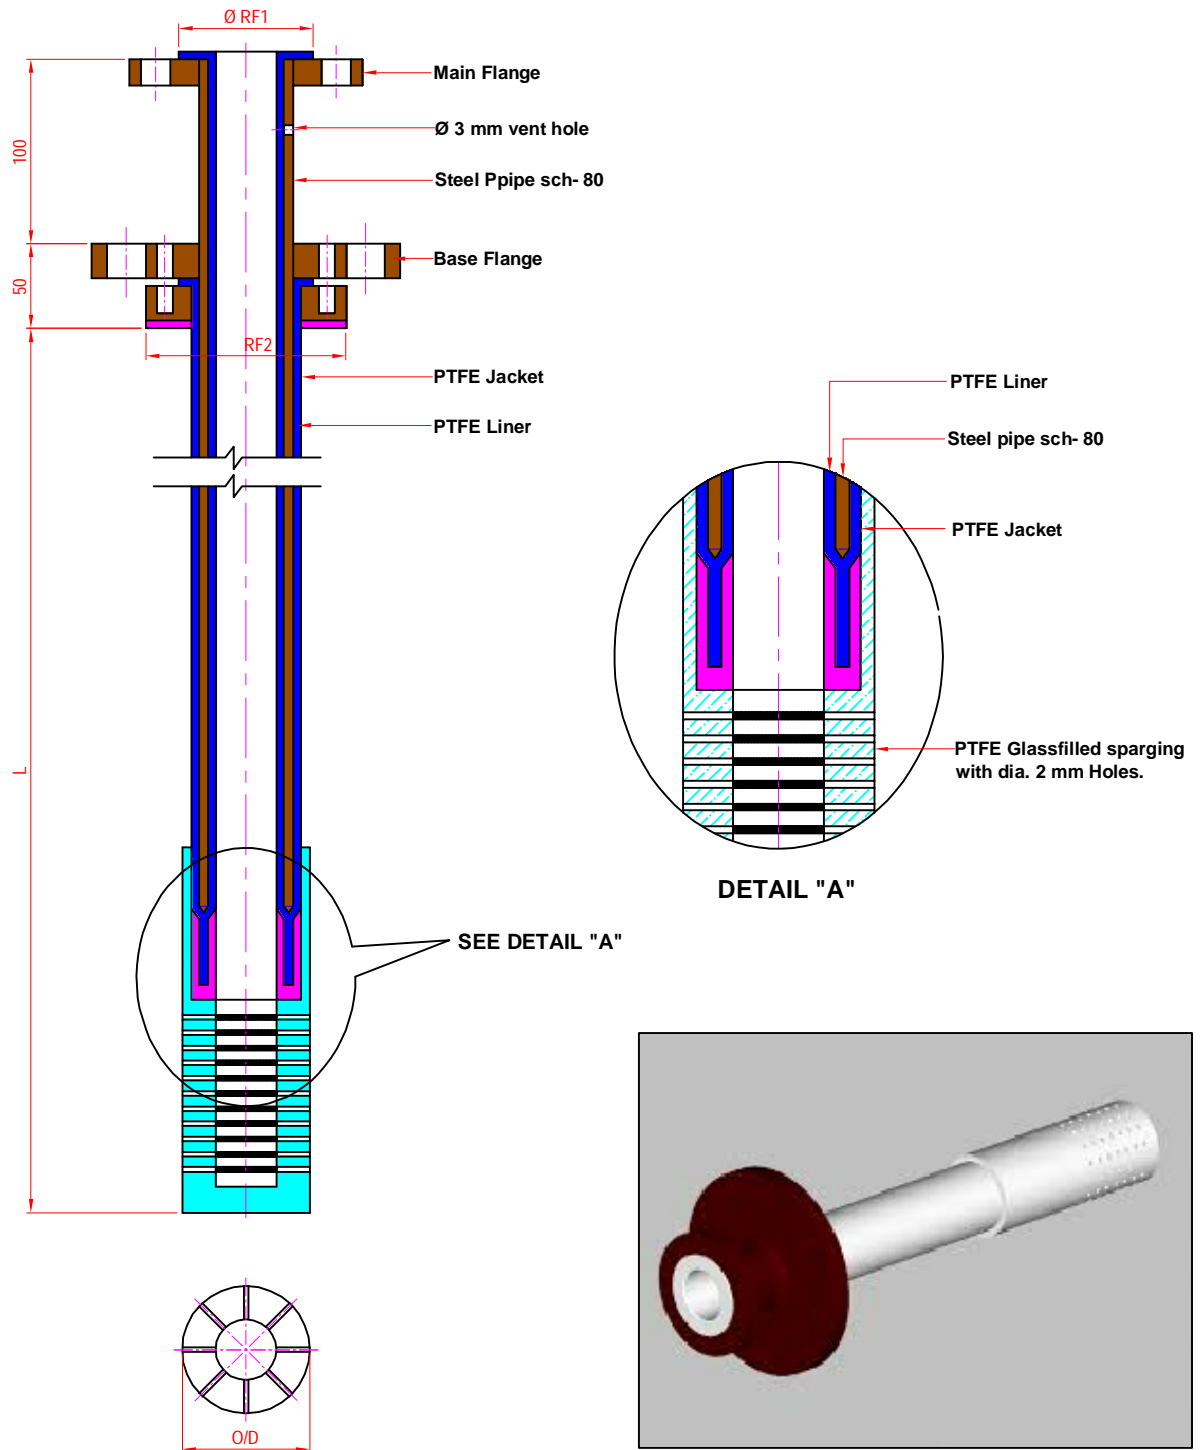

SIZE	RF1	RF2	PIPE	MAIN FLANGE	BASE FLANGE	L	O/D
1"	48	105	25	25 NB	65 NB	3000	55
1 1/2"	69	118	40	40 NB	80 NB	3000	68
2"	88	151	50	50 NB	100 NB	3000	80
3"	118	204	80	80 NB	150 NB	3000	109

TECHNICAL DATA	
TESTING & INSPECTION	Spark tested for 10 KV & Hydro tested at 10 kg/cm ² & painted with 2 coats of Red Oxide Primer
PRESSURE RATING	Vacuum to 6 kg/cm ²
TEMP. RATING	-29 °C TO 200° C